


### 3. 屋外暴露試験

太陽光の下で日射量を測定しながら実際のPmax(最大出力値)の劣化状況を計測する

屋外暴露試験\_中間結果

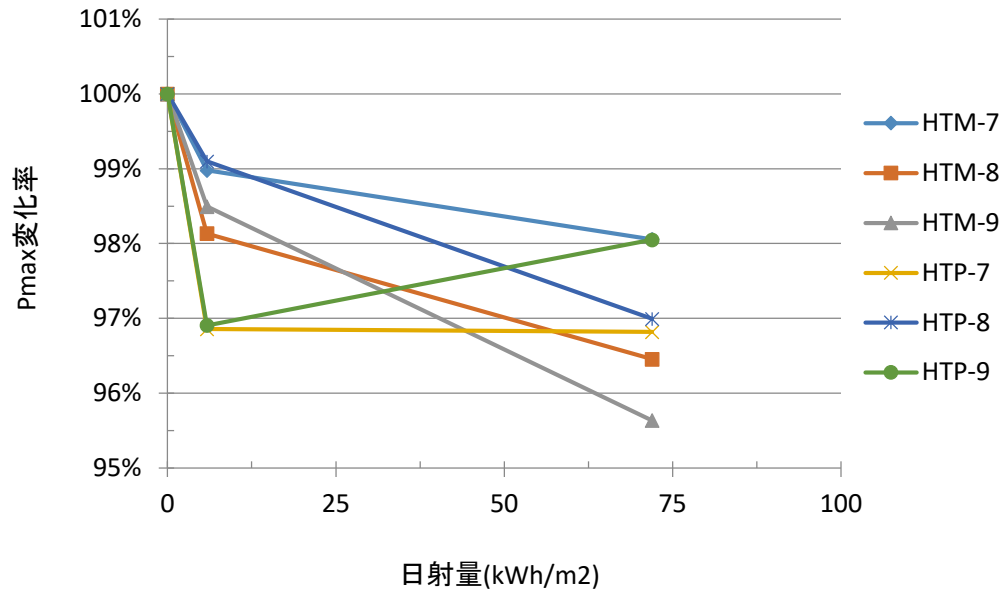

屋外暴露		日射量(kwh/m2)				
		0	5.87	71.96		
	HTM-7	100.0%	99.0%	98.1%		
	HTM-8	100.0%	98.1%	96.5%		
	HTM-9	100.0%	98.5%	95.6%		
	HTP-7	100.0%	96.9%	96.8%		
	HTP-8	100.0%	99.1%	97.0%		
	HTP-9	100.0%	96.9%	98.0%		

**日射量を0~75kWh/m<sup>2</sup>まで変化させた場合のPmax変化率は95.5%~98%であり合格  
(95%~105%の範囲内なら合格)**